

New Maximum Series

Glass Door Reach-in Refrigerator

Stainless Steel Interior and Front Digitally Controlled Uniform Temperature

* Digitally Controlled Temperature System

Enables you to see temperature control without opening the door.

Freshness of products lasts longer by keeping the correct temperature.

* Efficient Refrigeration System

Turbo Air's glass door reach-in refrigerators are designed with over-sized evaporators and condensers for faster cooling and greater efficiency.

* Bottom Mount Compressor

All units feature a bottom-mount compressor for energy savings, high efficiency and easy service. The bottom-mount compressor also allows the food to be placed in an ergonomically correct location.

* High-tech Monitor

The unit will beep to warn you if the door has been opened for more than 5 minutes.

The monitor digitally display the present temperature. You can easily adjust the temperature by pressing the up or down button.

* CFC Free

All Turbo Air refrigerators and freezers are foamed in place with high density, close cell poly-urethane that is CFC free.

* Self-diagnostic System

Shows the status of the unit immediately.

* Fluorescent Interior Lighting



MSR-23G-1



MSR-49G-2



Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Weight	L D H	List Price
MSR-23G-1	1	23	3	1/3	6.5	295	26.8 x 32.2 x 77.6	4,278.00
MSR-49G-2	2	49	6	1/2	11	416	53.9 x 32.2 x 77.6	6,286.00

* Height does not include 5" for caster height.

CABINET INTERIOR/EXTERIOR SPECIFICATIONS

ELECTRICAL DATA	MSR-23G-1	MSR-49G-2
Voltage	115/60-1	115/60-1
Feed Wires (With ground)	3	3
Wattage	550	900
Amperes	6.5 A	11 A
SHIPPING DATA		
Length-Crated (in)	28.3	55.5
Depth-Crated (in)	34	34
Height-Crated (in)	82.2	82.2
Volume Crated (cu.ft)	43.4	85.2
Net Weight (lbs)	295	416
Weight After Packing (lbs)	321	460
DIMENSIONAL DATA		
# of Doors	1	2
Cubic Feet	23	49
Rack capacity	1	2
Length Overall (in)	26.8	53.9
Depth Overall (in)	32.2	32.2
Height Overall (in)(with caster)	82.8	82.8
Interior Dimension (LxDxH)	22.9x24.2x59.3	50x24.2x59.3
Shelf Size	22x23.1	24.3x23.1
# of Shelves	3	6

*Design and specifications can be changed without prior notice for product improvement.

* **Double Pane Glass Door with Heat Reflecting film**

* **Refrigerator Hold 33°F~38°F**

* **Self-closing**

Door are equipped with self-closing


* **Bun Tray Rack Available**

All models are available for full bun tray racks.

* **Other Features**



- Solid and sturdy grill design.
- Foamed with polyurethane, high-density cell insulation. (CFC)
- Positive seal with self-closing doors.
- Automatic evaporator fan motor delay when the door is opened.
- Rounded corner contoured line.
- Door locks.
- 4"swivel casters. (standard)

ONE DOOR PLAN VIEW

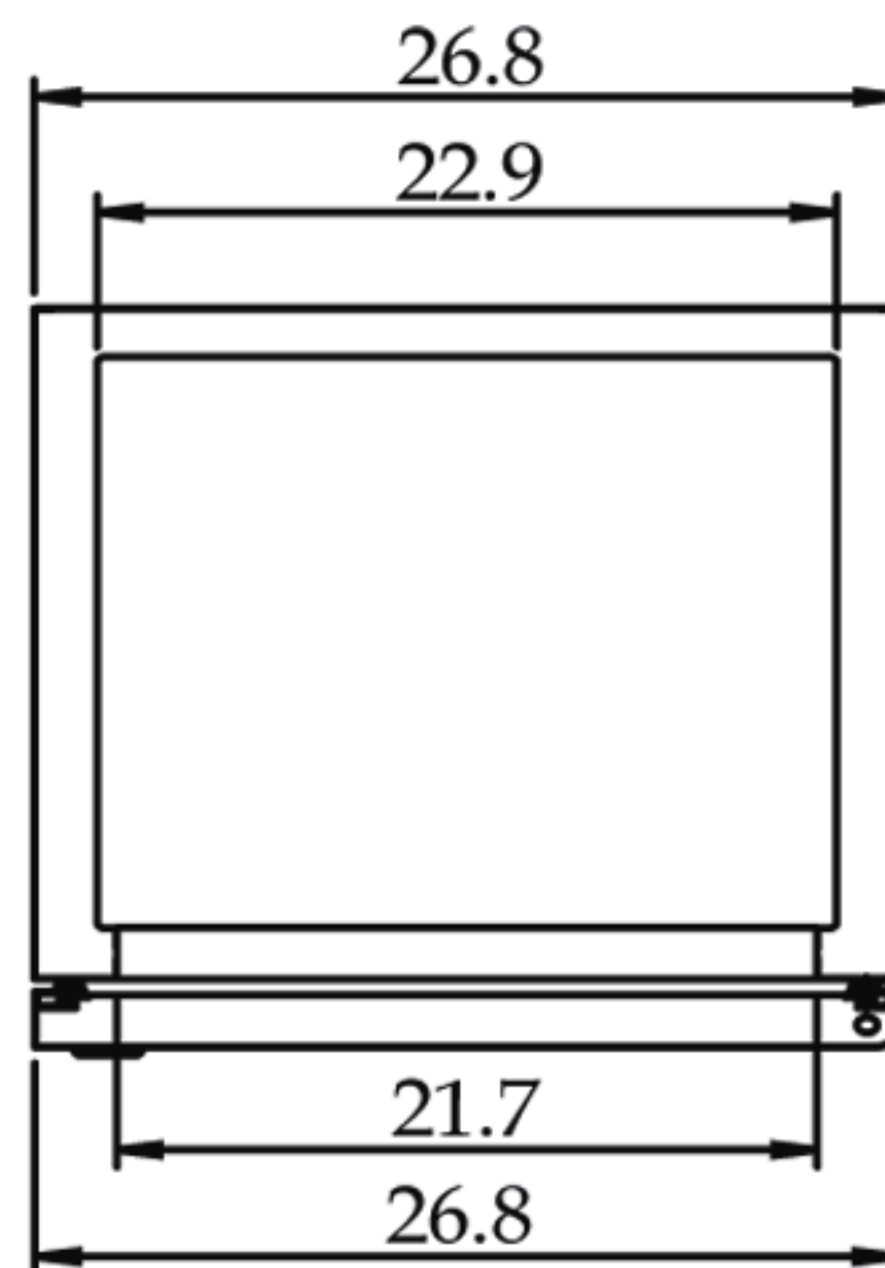

(unit : inch)

TWO DOOR PLAN VIEW

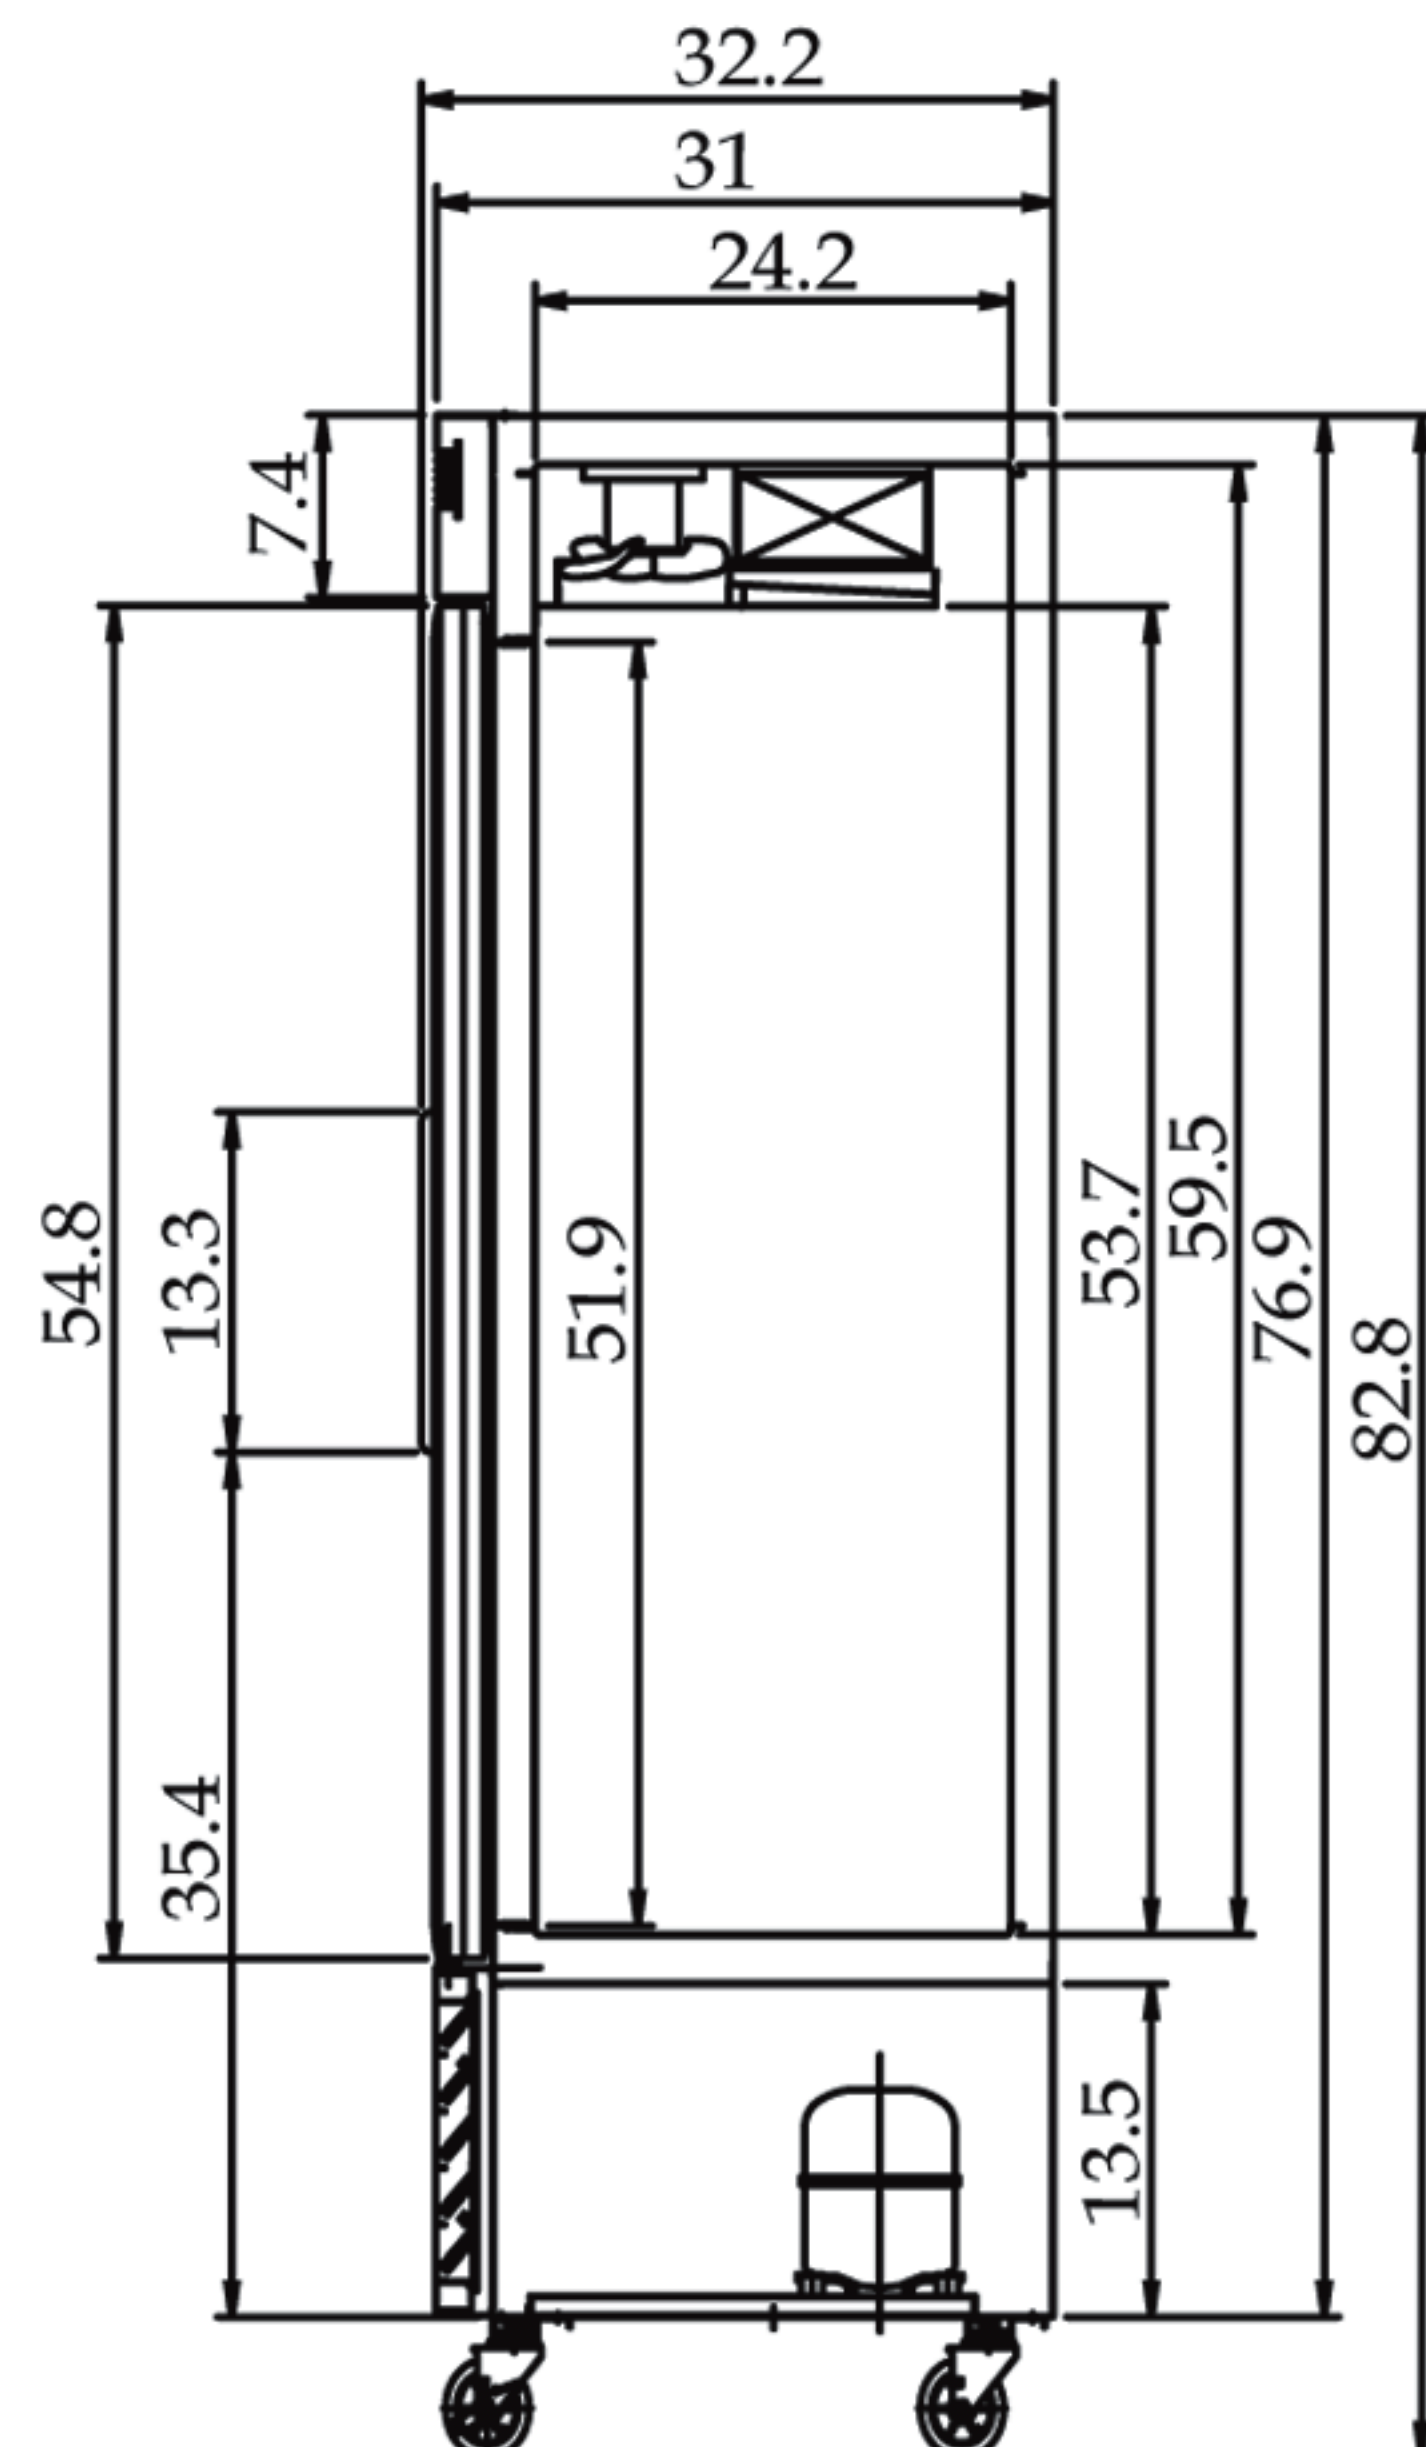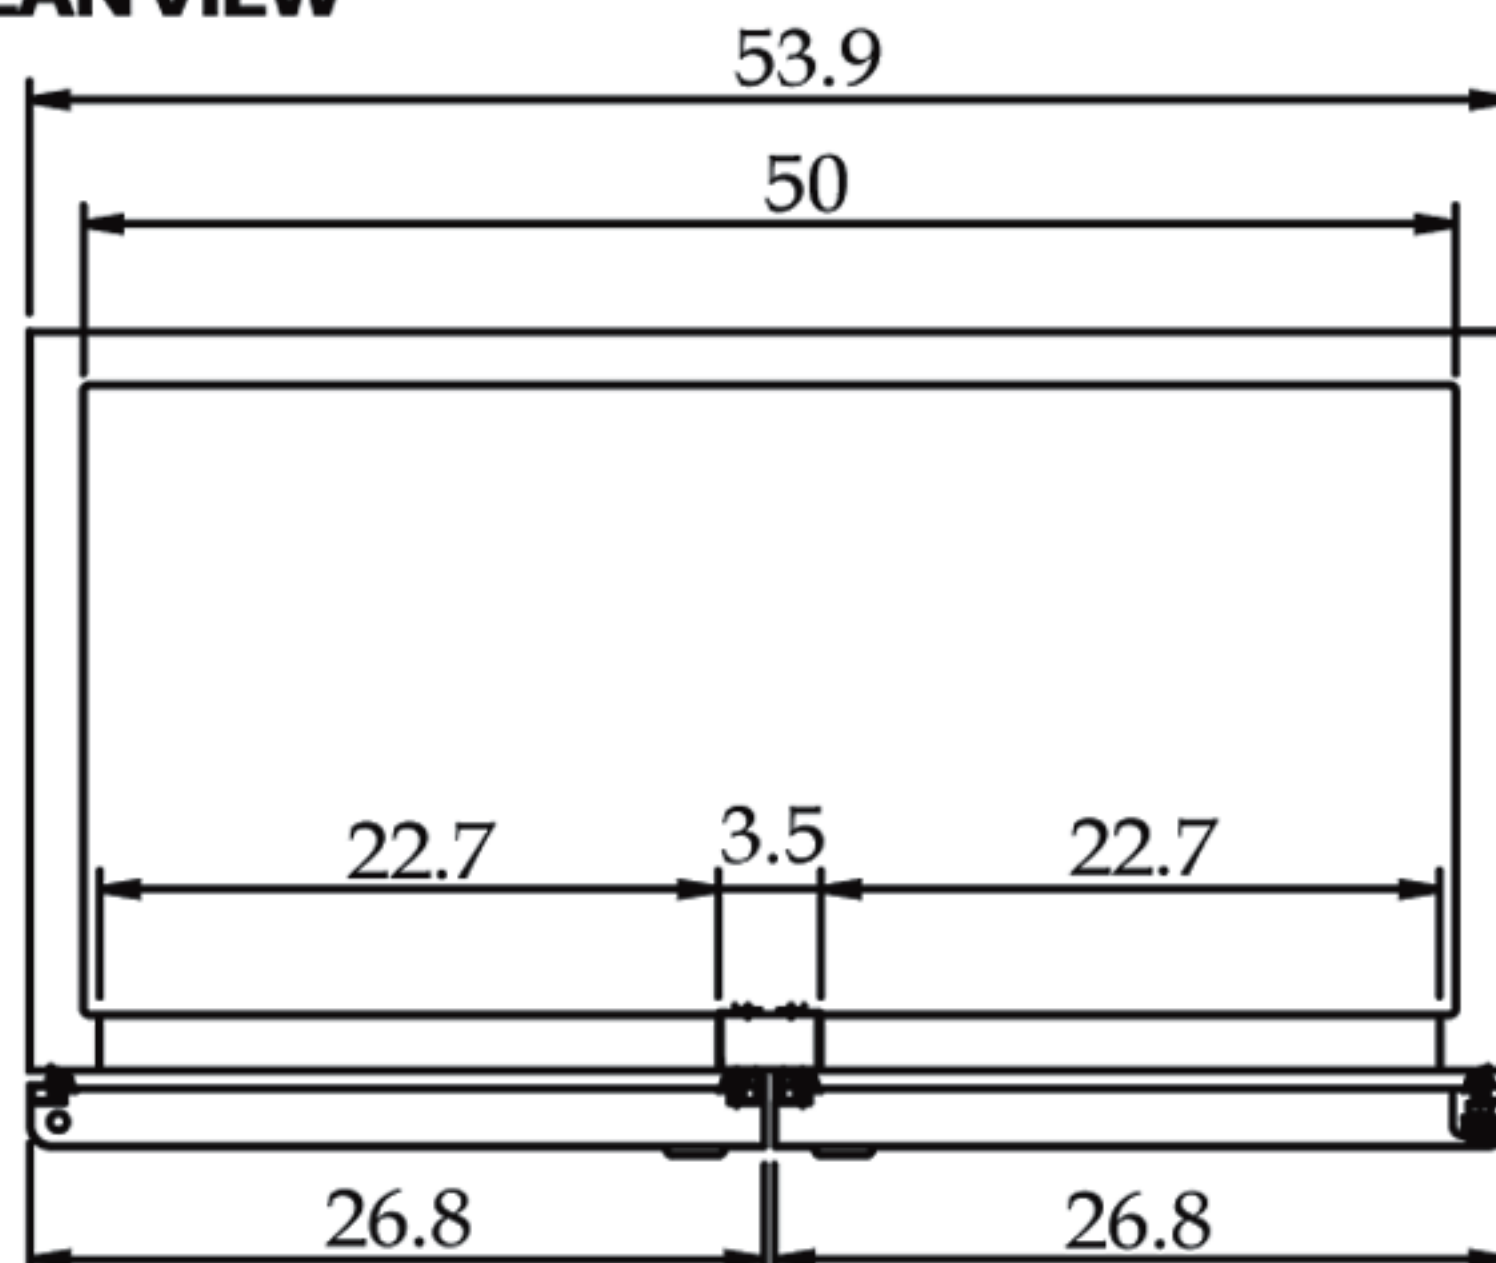

GLASS DOOR REACH-IN REFRIGERATOR SIDE VIEW