

# New Maximum Series

## Solid Door Refrigerator

### Stainless Steel Interior and Front Digitally Controlled Uniform Temperature

#### \* Digitally Controlled Temperature System

Enables temperature control without opening the door.

Freshness of products lasts longer by keeping the correct temperature.

#### \* Efficient Refrigeration System

Turbo Air's solid refrigerators are designed with over-sized evaporators and condensers for faster cooling and greater efficiency.

#### \* Bottom Mount Compressor

All units feature a bottom-mounted compressor for energy savings, high efficiency and easy service.

The bottom-mounted compressor also allows the food to be placed in an ergonomically correct location.

#### \* High-tech Monitor

The unit will beep to warn you if the door has been opened for more than 5 minutes. The monitor digitally display the present temperature.

You can easily adjust the temperature by pressing the up or down button.

#### \* CFC Free

All Turbo Air refrigerators and freezers are foamed in place with high density, close cell, poly-urethane that is CFC free.

#### \* Self-diagnostic System

Shows the status of the unit immediately.

#### \* CEC. California Energy Commission Certificated

#### \* MEA. City of New York Building Department Approved



LISTED  
COMMERCIAL  
REFRIGERATOR  
AND/OR FREEZER  
43BK



ISO9001

CEC  
MEA



MSR-23NM



MSR-49NM

Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Weight	L D H	List Price
MSR-23NM	1	23	3	1/3	3.72	264	26.8 x 31.1 x 77.6	3,384.00
MSR-49NM	2	49	6	1/2	7.0	385	53.9 x 31.1 x 77.6	5,198.00

\* Height does not include 5" for caster height.



## CABINET INTERIOR/EXTERIOR SPECIFICATIONS

<b>ELECTRICAL DATA</b>	<b>MSR-23NM</b>	<b>MSR-49NM</b>
Voltage	115/60-1	115/60-1
Feed Wires (With ground)	3	3
Wattage	550	900
Amperes	3.72 A	7 A
<b>SHIPPING DATA</b>		
Length-Crated (in)	28.3	52.4
Depth-Crated (in)	32.5	32.5
Height-Crated (in)	82.2	82.2
Volume Crated (cu.ft)	43.4	85.2
Net Weight (lbs)	264	385
Weight After Packing (lbs)	290	429
<b>DIMENSIONAL DATA</b>		
# of Doors	1	2
Cubic Feet	23	49
Rack capacity	1	2
Length Overall (in)	26.8	53.9
Depth Overall (in)	31.1	31.1
Height Overall (in) (with caster)	82.8	82.8
Interior Dimension (LxDxH)	22.9x24.2x59.5	50x24.2x59.5
Shelf Size	22x23.1	24.3x23.1
# of Shelves	3	6

\*Design and specifications can be changed without prior notice for product improvement.

### \* Self-contained System

No plumbing required. Simple installation.

### \* Field Reversible Door(MSR-23NM)

### \* Refrigerator Hold 33°F~38°F

### \* Bun Tray Rack Available


All models are available for full bun tray racks.

### \* Other Features


- Solid and sturdy grill design.
- Minimum wattage heater in the cabinet frame to conserve energy and keep your cabinet water free.
- Incandescent interior lighting.
- Positive seal with self closing doors.
- Automatic evaporator fan motor delay when the door is opened.
- The defrost systems are time initiated and temperature terminated.
- Door locks.
- 4"swivel casters. (standard)

### \* Foamed with polyurethane,high-density cell insulation (CFC free)


**ONE DOOR PLAN VIEW**

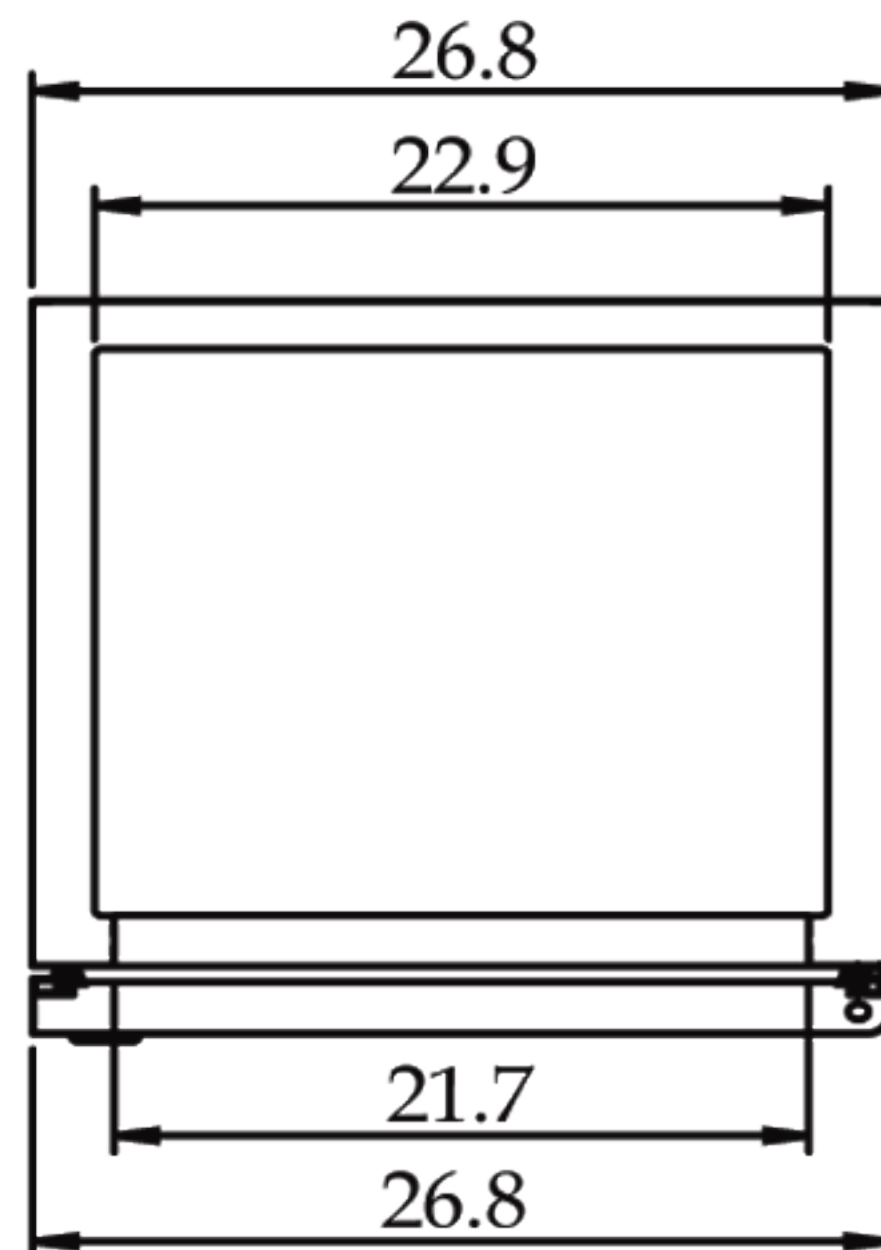

**TWO DOOR PLAN VIEW**

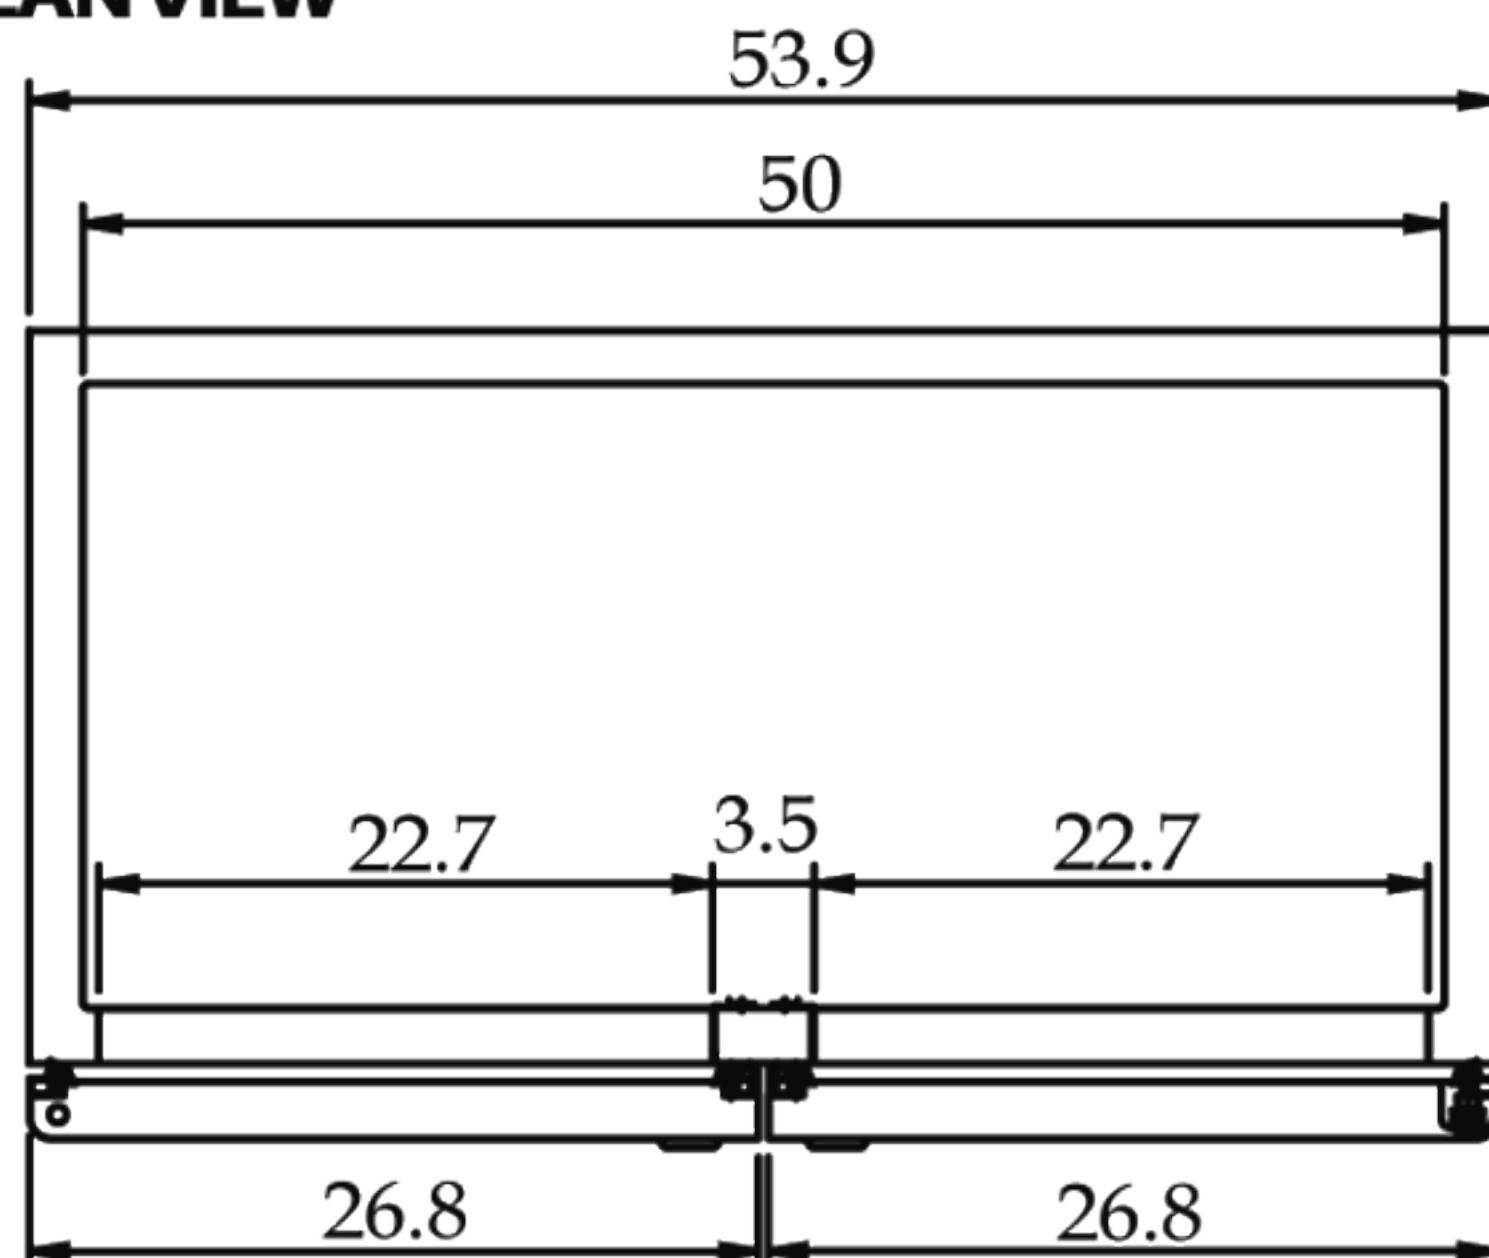

(UNIT : INCH)

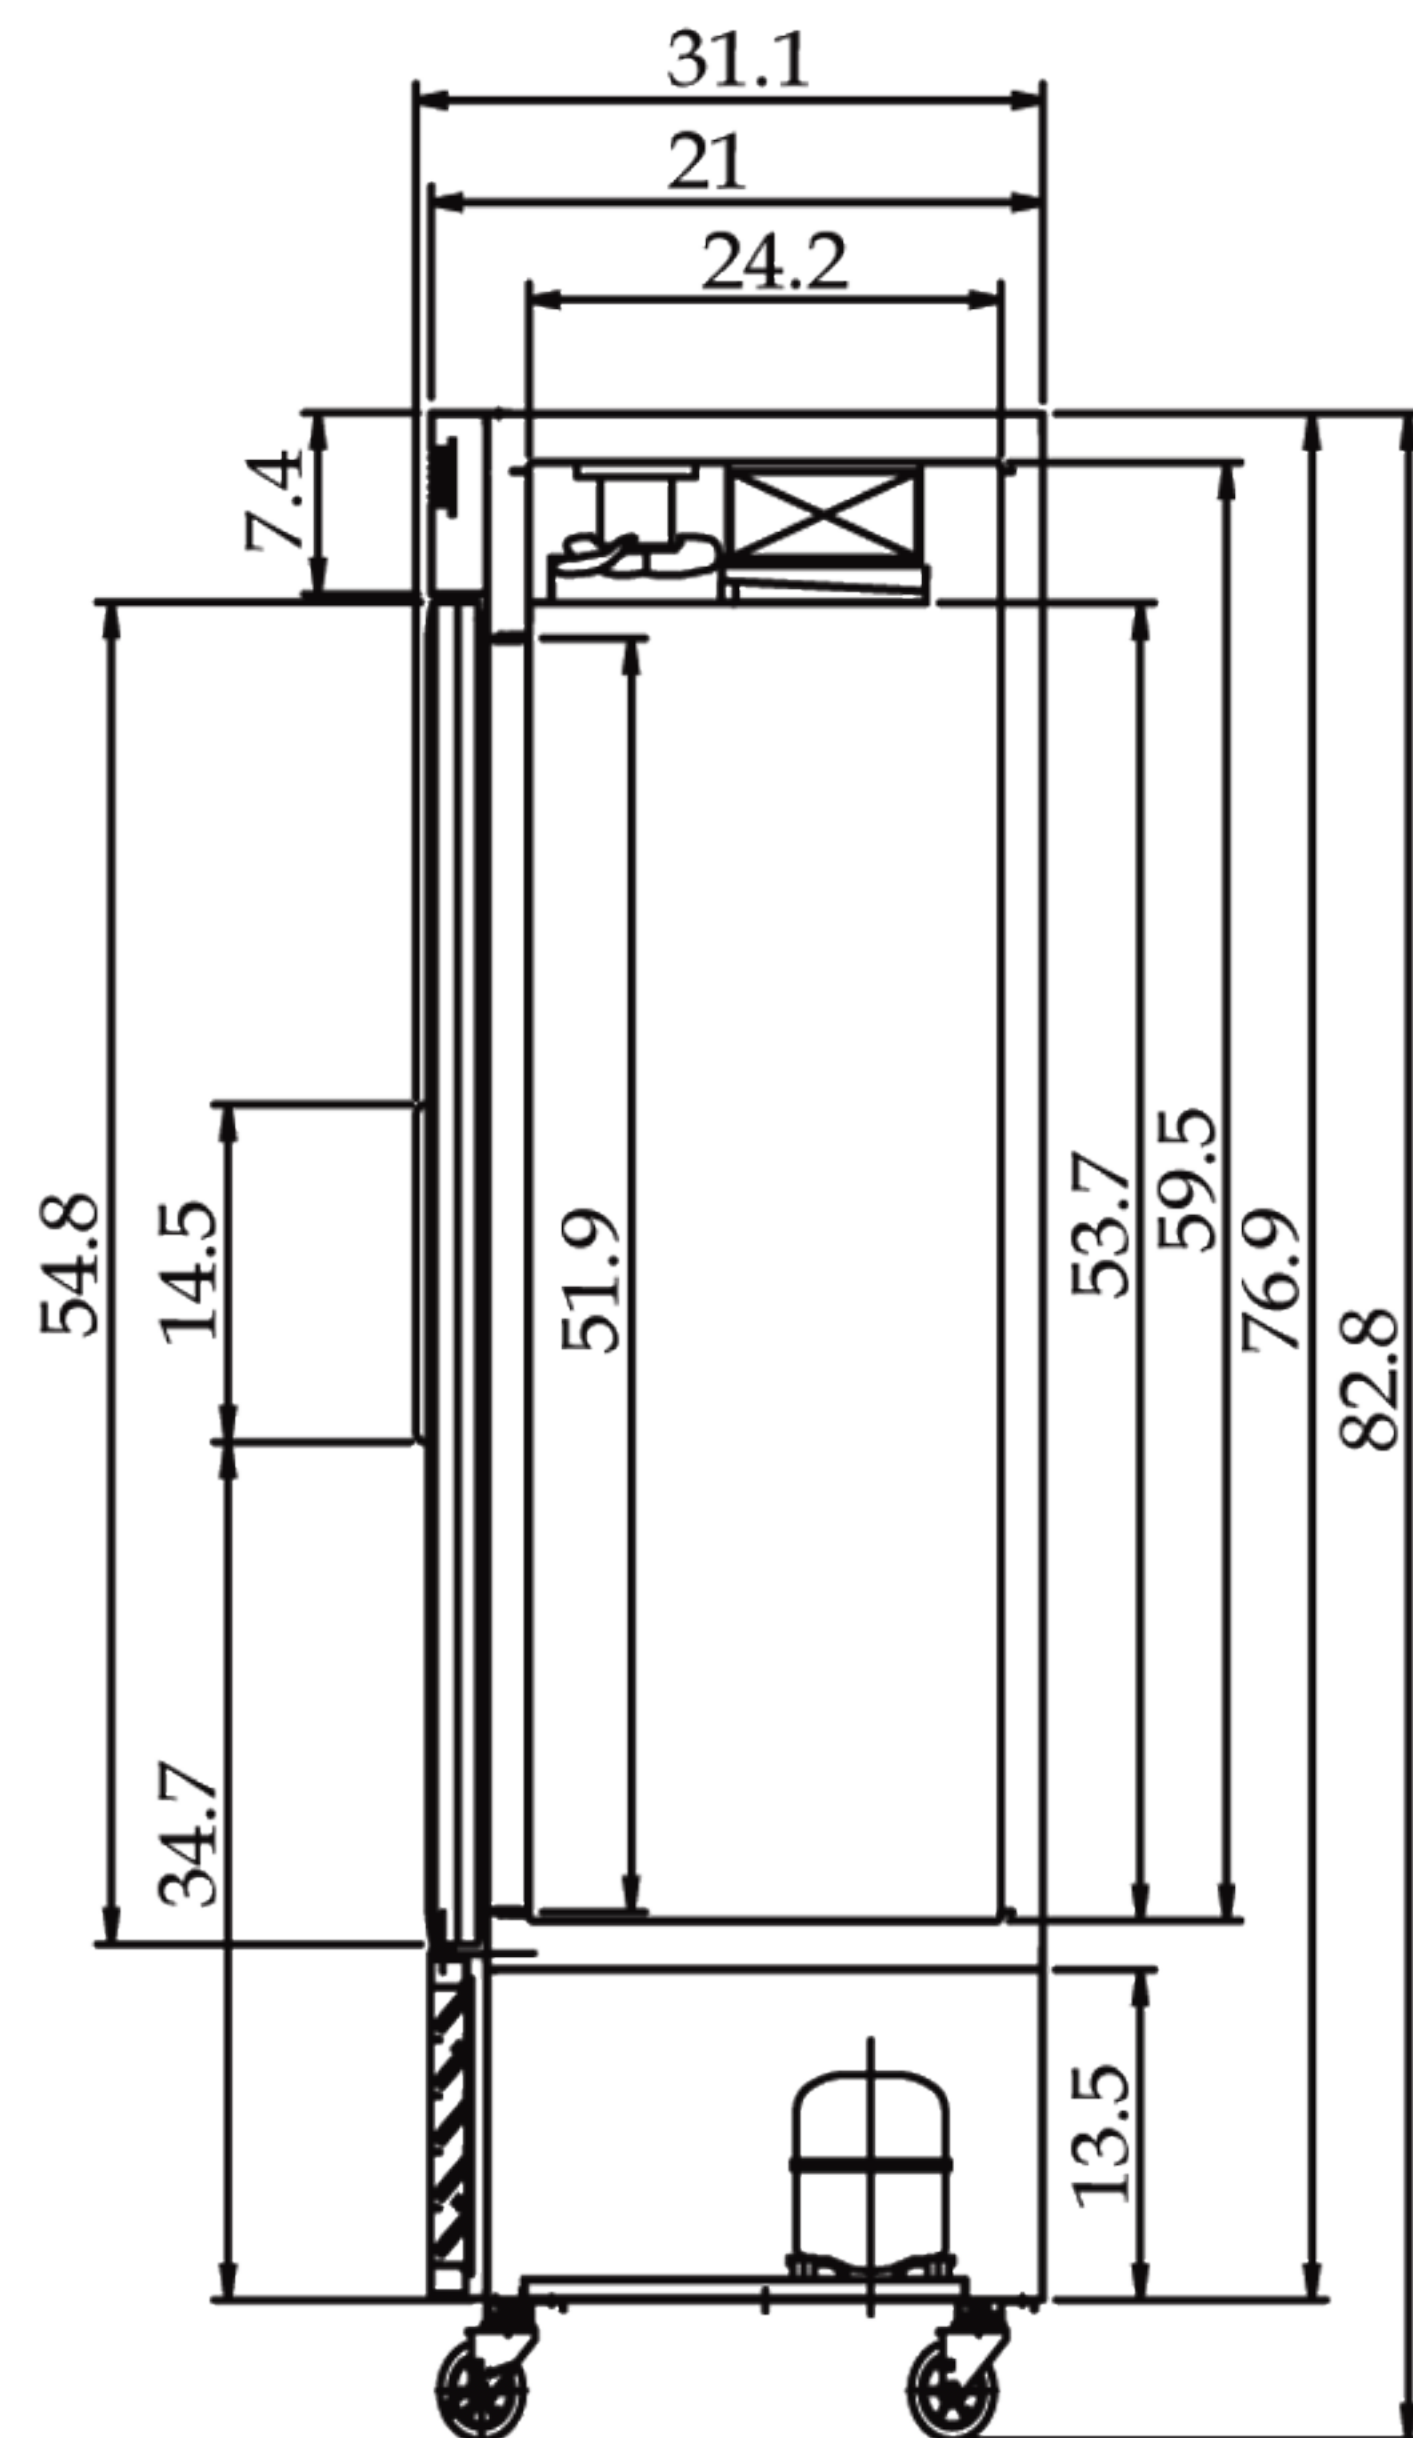

**SOLID DOOR SIDE VIEW**