


EXPLODED VIEW AND PART LIST

1. CONDENSING UNIT (TH – TYPE)

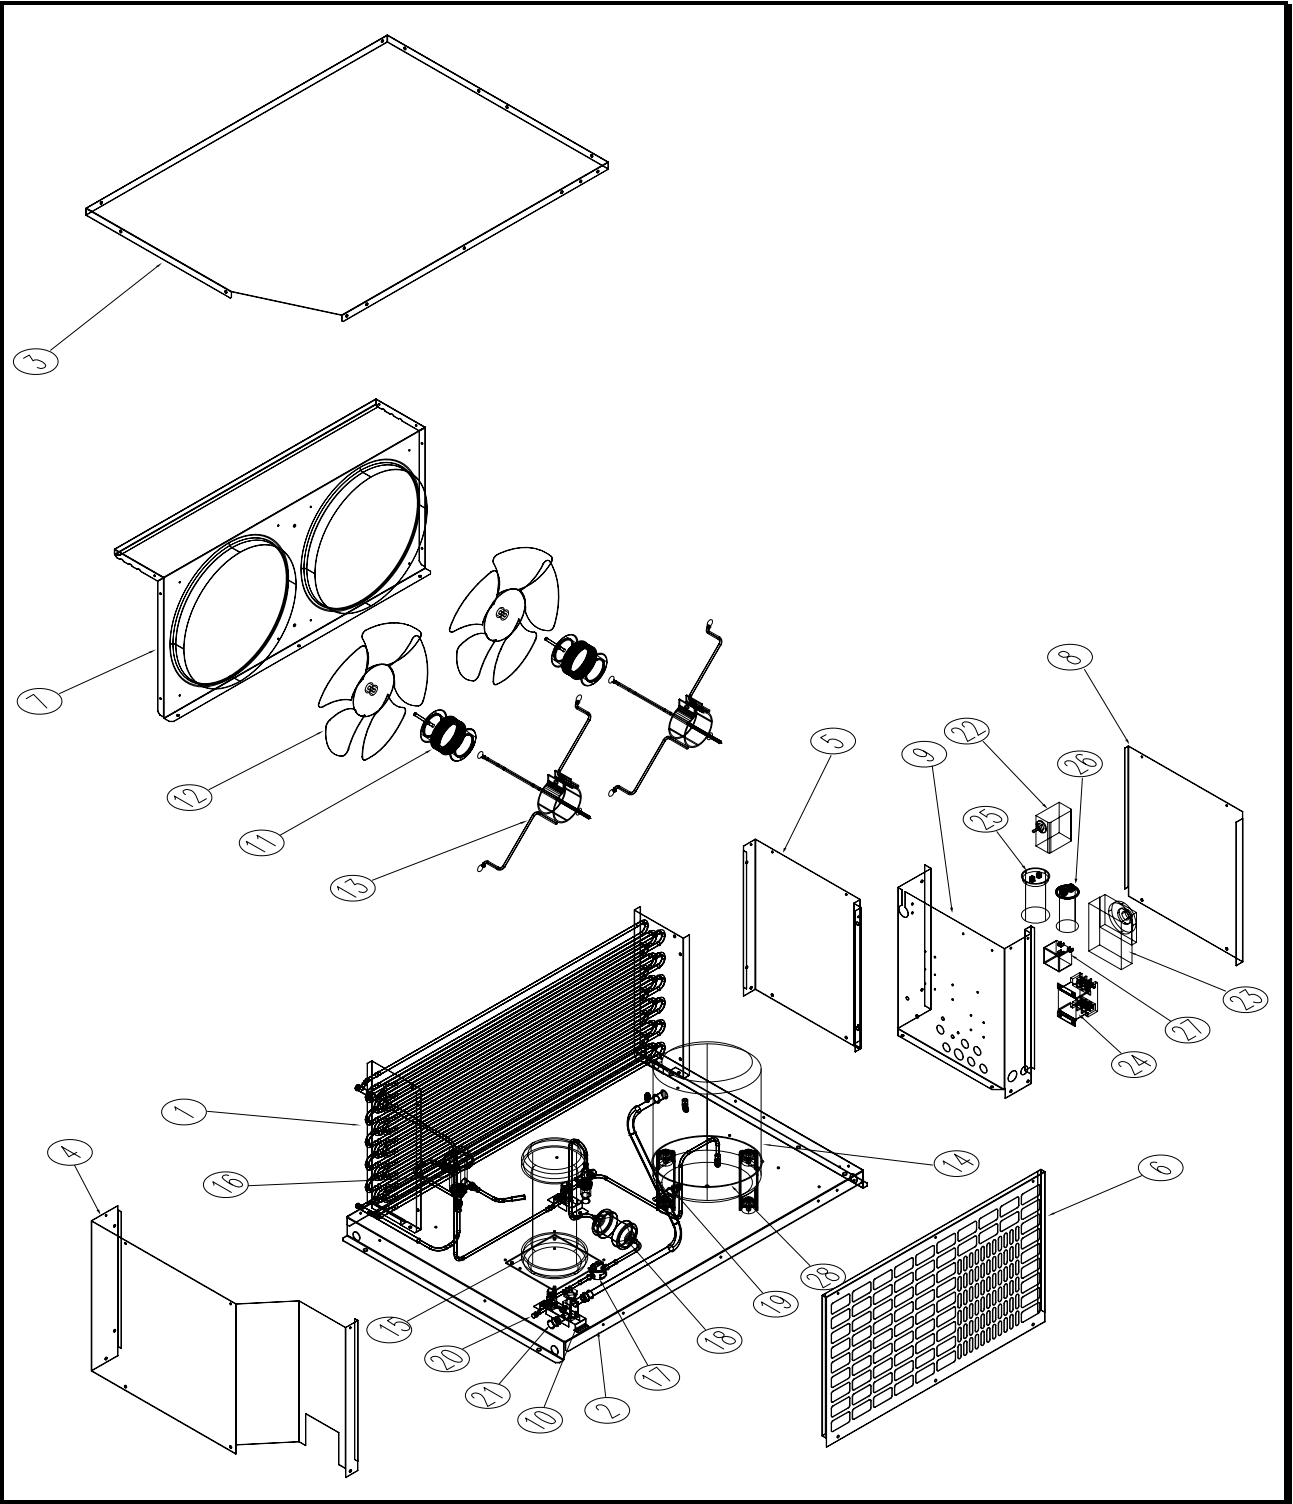

2. CONDENSING UNIT (TH – TYPE) PART LIST

2-1. TH008DR222

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH01	COIL ASS'Y	1		
2	K3300234	BOTTOM PANEL	1	SGHC	
3	K3300237	TOP PANEL	1	SGCC	
4	K3300240	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300245	NETTING PANEL	1	SGCC	
7	K3300248	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH008D2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	1	1φ 230V 110W 4P	
12	31-0013505	FAN	1	A5052	
13	31-004WMB350	MOTOR BRACKET	1	For φ350	
14	31-023RS64C2CAV	COMPRESSOR	1	RS64C2-CAV	
15	31-02406LBS	RECIVER	1	6Lbs	
16	31-027HPC5T3	PRESSURE REGULATORS	1	HPC 5T3	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0280808	VALVE-2	1	1/2"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-032SMC25P2	MAGNETIC CONTACTOR	1	SMC-25P2	
25	31-014-0061-09	START CAPACITOR	1	014-0061-09	
26	31-014-0037-06	RUN CAPACITOR	1	014-0037-06	
27	31-014-0001-60	POTENTIAL RELAY	1	040-0001-60	
28	31-918-0038-02	CRANKCASE HEATER	1	918-0038-02	

*: Asterisk part is for fan speed controlling model which is suffixed “-A” to the model number

2-2. TH010DR222

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH01	COIL ASS'Y	1		
2	K3300234	BOTTOM PANEL	1	SGHC	
3	K3300237	TOP PANEL	1	SGCC	
4	K3300240	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300245	NETTING PANEL	1	SGCC	
7	K3300248	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH010D2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	1	1φ 230V 110W 4P	
12	31-0013505	FAN	1	A5052	
13	31-004WMB350	MOTOR BRACKET	1	For φ 350	
14	31-023RS70C1PFV	COMPRESSOR	1	RS70C1-PFV	
15	31-02406LBS	RECIVER	1	6Lbs	
16	31-027HPC5T3	PRESSURE REGULATORS	1	HPC 5T3	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281010	VALVE-2	1	5/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-032SMC25P2	MAGNETIC CONTACTOR	1	SMC-25P2	
25	31-014-0061-14	START CAPACITOR	1	014-0061-14	
26	31-014-0037-09	RUN CAPACITOR	1	014-0037-09	
27	31-040-0001-60	POTENTIAL RELAY	1	040-0001-60	
28	31-918-0038-02	CRANKCASE HEATER	1	918-0038-02	

*: Asterisked part is for fan speed controlling model which is suffixed “-A” to the model number

2-3. TH015DR222

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH02	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH015D2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CR18KQPFV	COMPRESSOR	1	CR18KQ-PFV	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281010	VALVE-2	1	5/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-032SMC25P2	MAGNETIC CONTACTOR	1	SMC-25P2	
25	31-014-0006-16	START CAPACITOR	1	014-0006-16	
26	31-014-0048-16	RUN CAPACITOR	1	014-0048-16	
27	31-040-0001-55	POTENTIAL RELAY	1	040-0001-55	
28	31-018-0075-00	CRANKCASE HEATER	1	018-0075-00	

*: Asterisk part is for fan speed controlling model which is suffixed "A" to the model number

2-4. TH015DR223

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH02	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH015D3	CONTROL BOX ASS'Y		3 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CR18KQTF5	COMPRESSOR		CR18KQ-TF5	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281010	VALVE-2	1	5/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28	31-018-0075-00	CRANKCASE HEATER	1	018-0075-00	

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number

2-5. TH020DR222

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH03	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH020D2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CR24KQPFV	COMPRESSOR	1	CR24KQ-PFV	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-032SMC25P2	MAGNETIC CONTACTOR	1	SMC-25P2	
25	31-014-0006-16	START CAPACITOR	1	014-0006-16	
26	31-014-0048-17	RUN CAPACITOR	1	014-0048-17	
27	31-040-0001-55	POTENTIAL RELAY	1	040-0001-55	
28	31-018-0075-00	CRANKCASE HEATER	1	018-0075-00	

*: Asterisked part is for fan speed controlling model which is suffixed “-A” to the model number

2-6. TH020DR223

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH03	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH020D3	CONTROL BOX ASS'Y		3 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CR24KQTF5	COMPRESSOR		CR24KQ-TF5	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28	31-018-0075-00	CRANKCASE HEATER	1	018-0075-00	

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number

2-7. TH030DR222

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH04	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH030D2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1φ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For φ550	
14	31-023CR37KQPFV	COMPRESSOR	1	CR37KQ-PFV	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25	31-014-0006-13	START CAPACITOR	1	014-0006-13	
26	31-014-0048-12	RUN CAPACITOR	1	014-0048-12	
27	31-040-0001-60	POTENTIAL RELAY	1	040-0001-60	
28					

*: Asterisk part is for fan speed controlling model which is suffixed "–A" to the model number

2-8. TH030DR223

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH04	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH030D3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1 ϕ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For ϕ 550	
14	31-023CR37KQTF5	COMPRESSOR		CR37KQ-TF5	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number

2-9. TH040DR222

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH040D2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1φ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For φ550	
14	31-023CR53KQPFV	COMPRESSOR	1	CR53KQ-PFV	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25	31-014-0006-13	START CAPACITOR	1	014-0006-13	
26	31-014-0048-22	RUN CAPACITOR	1	014-0048-22	
27	31-040-0001-59	POTENTIAL RELAY	1	040-0001-59	
28					

*: Asterisked part is for fan speed controlling model which is suffixed “-A” to the model number

2-10. TH040DR223

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH040D3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1 ϕ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For ϕ 550	
14	31-023CR53KQTF5	COMPRESSOR		CR53KQ-TF5	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisk part is for fan speed controlling model which is suffixed "-A" to the model number

2-11. TH050DR222

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH050D2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1φ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For φ550	
14	31-023CRN0500PF	COMPRESSOR	1	CRN5-0500-PFV	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP8T4	PRESSURE REGULATORS	1	HP 8T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25	31-014-0006-15	START CAPACITOR	1	014-0006-15	
26	31-014-0037-21	RUN CAPACITOR	1	014-0037-21	
27	31-040-0001-59	POTENTIAL RELAY	1	040-0001-59	
28					

*: Asterisk part is for fan speed controlling model which is suffixed "–A" to the model number

2-12. TH050DR223

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH050D3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1 ϕ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For ϕ 550	
14	31-023CRN0500TF	COMPRESSOR		CRN5-0500-TF5	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP8T4	PRESSURE REGULATORS	1	HP 8T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23					
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number

2-13. TH015LR404A2

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH02	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH015L2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CS10K6EPF	COMPRESSOR	1	CS10K6E-PFV	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HPC5T3	PRESSURE REGULATORS	1	HPC 5T3	
	31-0252UA449W	FAN CYCLING SWITCH	1	ACB-2UA449W	*
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281010	VALVE-2	1	5/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-032SMC25P2	MAGNETIC CONTACTOR	1	SMC-25P2	
25	31-014-0061-04	START CAPACITOR	1	014-0061-04	
26	31-014-0037-10	RUN CAPACITOR	1	014-0037-10	
27	31-040-0001-60	POTENTIAL RELAY	1	040-0001-60	
28					

*: Asterisk part is for fan speed controlling model which is suffixed "-A" to the model number

2-14. TH015LR404A3

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH02	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH015L3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1 ϕ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For ϕ 350	
14	31-023CS10K6ETF	COMPRESSOR		CS10K6E-TF5	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HPC5T3	PRESSURE REGULATORS	1	HPC 5T3	
	31-0252UA449W	FAN CYCLING SWITCH	1	ACB-2UA449W	*
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281010	VALVE-2	1	5/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisk part is for fan speed controlling model which is suffixed "-A" to the model number

2-15. TH020LR404A2

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH03	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH020L2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CS12K6EPF	COMPRESSOR	1	CS12K6E-PFV	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA449W	FAN CYCLING SWITCH	1	ACB-2UA449W	*
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-032SMC25P2	MAGNETIC CONTACTOR	1	SMC-25P2	
25	31-014-0061-04	START CAPACITOR	1	014-0061-04	
26	31-014-0037-10	RUN CAPACITOR	1	014-0037-10	
27	31-040-0001-60	POTENTIAL RELAY	1	040-0001-60	
28					

*: Asterisk part is for fan speed controlling model which is suffixed "-A" to the model number

2-16. TH020LR404A3

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH03	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH020L3	CONTROL BOX ASS'Y		3 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CS12K6ETF	COMPRESSOR		CS12K6E-TF5	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA449W	FAN CYCLING SWITCH	1	ACB-2UA449W	*
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisk part is for fan speed controlling model which is suffixed "-A" to the model number

2-17. TH025LR404A2

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH03	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH025L2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1φ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For φ 350	
14	31-023CS14K6EPF	COMPRESSOR	1	CS14K6E-PFV	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA449W	FAN CYCLING SWITCH	1	ACB-2UA449W	*
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-032SMC25P2	MAGNETIC CONTACTOR	1	SMC-25P2	
25	31-014-0036-20	START CAPACITOR	1	014-0036-20	
26	31-014-0037-11	RUN CAPACITOR	1	014-0037-11	
27	31-040-0001-55	POTENTIAL RELAY	1	040-0001-55	
28					

*: Asterisk part is for fan speed controlling model which is suffixed "-A" to the model number

2-18. TH025LR404A3

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH03	COIL ASS'Y	1		
2	K3300235	BOTTOM PANEL	1	SGHC	
3	K3300238	TOP PANEL	1	SGCC	
4	K3300241	SIDE PANEL-L	1	SGCC	
5	K3300243	SIDE PANEL-R	1	SGCC	
6	K3300246	NETTING PANEL	1	SGCC	
7	K3300249	FRONT PANEL	1	SGCC	
8	K3300251	C/P COVER	1	SGCC	
9	31-050TH025L3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00231104	MOTOR	2	1 ϕ 230V 110W 4P	
12	31-0013505	FAN	2	A5052	
13	31-004WMB350	MOTOR BRACKET	2	For ϕ 350	
14	31-023CS14K6ETF	COMPRESSOR		CS14K6E-TF5	
15	31-02410LBS	RECIVER	1	10Lbs	
16	31-027HP5T3	PRESSURE REGULATORS	1	HP 5T3	
	31-0252UA449W	FAN CYCLING SWITCH	1	ACB-2UA449W	*
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT3	MOISTURE INDICATORS	1	AMI 1TT3	
18	31-029EK083S	FILTER DRIER	1	EK-083S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280606	VALVE-1	2	3/8"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number

2-19. TH032LR404A2

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH04	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH032L2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1φ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For φ550	
14	31-023CS20K6EPF	COMPRESSOR	1	CS20K6E-PFV	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25	31-014-0006-13	START CAPACITOR	1	014-0006-13	
26	31-014-0064-08	RUN CAPACITOR	1	014-0064-08	
27	31-040-0001-55	POTENTIAL RELAY	1	040-0001-55	
28					

*: Asterisk part is for fan speed controlling model which is suffixed "A" to the model number

2-20. TH032LR404A3

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH04	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH032L3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1 ϕ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For ϕ 550	
14	31-023CS20K6ETF	COMPRESSOR		CS20K6E -TF5	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281412	VALVE-2	1	7/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number

2-21. TH040LR404A2

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH040L2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1φ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For φ550	
14	31-023CS27K6EPF	COMPRESSOR	1	CS27K6E-PFV	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25	31-014-0006-13	START CAPACITOR	1	014-0006-13	
26	31-014-0037-18	RUN CAPACITOR	1	014-0037-18	
27	31-040-0001-64	POTENTIAL RELAY	1	040-0001-64	
28					

*: Asterisked part is for fan speed controlling model which is suffixed "–A" to the model number

2-22. TH040LR404A3

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH040L3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1 ϕ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For ϕ 550	
14	31-023CS27K6ETF	COMPRESSOR		CS27K6E -TF5	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP5T4	PRESSURE REGULATORS	1	HP 5T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number

2-23. TH050LR404A2

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH050L2	CONTROL BOX ASS'Y	1	1 φ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1φ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For φ550	
14	31-023CS33K6EPF	COMPRESSOR	1	CS20K6E-PFV	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP8T4	PRESSURE REGULATORS	1	HP 8T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25	31-014-0006-15	START CAPACITOR	1	014-0006-15	
26	31-014-0037-21	RUN CAPACITOR	1	014-0037-21	
27	31-040-0001-68	POTENTIAL RELAY	1	040-0001-68	
28					

*: Asterisk part is for fan speed controlling model which is suffixed "A" to the model number

2-24. TH050LR404A3

No	Part No.	Part Name	Q'TY	Spec	Remark
1	2A-TH05	COIL ASS'Y	1		
2	K3300236	BOTTOM PANEL	1	SGHC	
3	K3300239	TOP PANEL	1	SGCC	
4	K3300242	SIDE PANEL-L	1	SGCC	
5	K3300244	SIDE PANEL-R	1	SGCC	
6	K3300247	NETTING PANEL	1	SGCC	
7	K3300250	FRONT PANEL	1	SGCC	
8	K3300252	C/P COVER	1	SGCC	
9	31-050TH050L3	CONTROL BOX ASS'Y		3 ϕ	
10	K3300253	S/V SUPPORTER	2	SGCC	
11	31-00242506	MOTOR	1	1 ϕ 230V 250W 6P	
12	31-0015504	FAN	1	A5052	
13	31-004WMB550	MOTOR BRACKET	1	For ϕ 550	
14	31-023CS33K6ETF	COMPRESSOR		CS20K6E -TF5	
15	31-02420LBS	RECIVER	1	20Lbs	
16	31-027HP8T4	PRESSURE REGULATORS	1	HP 8T4	
	31-0252UA450W	FAN CYCLING SWITCH	1	ACB-2UA450W	*
17	31-030AMI1TT4	MOISTURE INDICATORS	1	AMI 1TT4	
18	31-029EK084S	FILTER DRIER	1	EK-084S	
19	31-0252UB365W	PRESSURE CONTROLS	1	ACB-2UB365W	
20	31-0280808	VALVE-1	2	1/2"	
21	31-0281814	VALVE-2	1	1-1/8"	
22	31-026PS1A3K	LOW PRESSURE SWITCH	1	PS1-A3K	
23	31-031814520B	DEFROST TIMER	1	D81-8145-20B	
24	31-03242CF35AG	MAGNETIC CONTACTOR	1	42CF35AG	
25					
26					
27					
28					

*: Asterisked part is for fan speed controlling model which is suffixed "-A" to the model number